





SPC RIGID CORE LUXURY VINYL PLANKS COLLECTION



QDI SURFACES® is an Arizona born and family-owned professional distribution company that has been in business Since 1996! We are very excited to be celebrating our 27th Year Anniversary in 2023. This milestone achievement was only possible by our solid business principles, our valued customers and our wonderful staff dedicated to quality and outstanding customer service.

Our **MISSION** is to provide our customers the best possible floor coverings purchasing experience!

Our VISION to achieve this mission is by supplying Superior Quality Materials, Unmatched Selection, Always in Stock Availability, Best Price for the Value and Outstanding Customer Service!

QDI SURFACES® has always been the Innovator & Pioneer in the surface covering industry by introducing more selections, colors, sizes, and the latest in fashion and style carefully and tastefully hand-picked at the best quarries and the factories around the world.

We are always dedicated to the Best Business Practices & Principles coupled with Superior Customer Service. We always welcome the opportunity to be a Trusted Supplier Partner with our customers for Years to Come.

PLANK FLOORING INTENDED USE



BANKS



HOMES



BASEMENTS



OFFICES



HEALTHCARE FACILITIES



RESIDENTIAL & COMMERCIAL CONDOMINIUMS





100% VIRGIN VINYL

CARE AND MAINTENANCE

- Use doormats outside each entrance to your home or business to prevent dirt, sand, grit and other substances from being tracked onto your floor. Use non-staining mats on your floor. Do not put rubber-backed, latex-backed orcoco fiber mats on your floor because they will stain or damage the surface.
- Close your curtains or blinds where extreme sunlight hits the floor. A
 combination of heat and sunlight causes most home furnishings to fade
 or discolour.
- Support furniture with wide-bearing, non-staining floor protectors.
 Ideally, the protectors should be at least one inch in diameter, made of non-pigmented hard plastic, and rest flat on the floor. Non-staining felt protectors are also acceptable. Casters (type W), felt pads or floor protectors are recommended for all moveable furniture. Use protection mats under chairs with caster in order to avoid abrasion of the vinyl flooring. Make sure that any metal protectors are rust-proof.
- If you need to move heavy furniture and/or appliances across the floor, always use strips of wood or hardboard runways to protect the floor.
 Always use runways even if you have an appliance dolly, or even if the heavy objects are equipped with wheels or rollers.
- Sweep your flooring regularly with a damp cloth and only with water at least once a week.
- Prevent stains by wiping up spills promptly.
- Occasional mopping with Rinse-Free Cleaner is recommended when dirt
 builds up and sweeping alone is not sufficient. Follow strictly the guidelines
 given on the bottle. Do not use soap or detergent products as they will leave
 a dulling film.

All SPC plank flooring requires effective cleaning and maintenance to ensure durability, appearance and safety. How frequent the floor must be maintained depends largely on the amount and type of traffic and the amount and frequency of soiling. The type and color are important, too. For example, solid colored and smooth embossed floors will show scuffs, scratches, dirt and general wear more that multi-colored or textured embossed patterns. Likewise, light colors will show marks more than darker colors. Although QDI Surfaces Products can make general recommendations, the local conditions will determine what specific maintenance is needed. It is the responsibility of the maintenance contractor to set up a maintenance program, meeting the needs of the facility. Maintenance requirements for various installations such as an office suite verses a supermarket, restaurant dining area, large or small retail store, or residential applications may vary.

Whenever possible, get a Rise-Free care instruction from your flooring retailer or manufacturer. For stubborn stains, use denatured alcohol or stain remover made specifically for luxury vinyl. Gently rub at the stain until it is removed.

STAIN GUIDE

- The overall stain resistance of our floors is excellent and most spills will wipe off quickly and easily with a clean, white cloth.
- Removing certain substances may take a little extra effort, as outlined in the chart below.
- Start with first step listed. Only do steps necessary to resolve the problem.
- Always use a clean, white cloth for wiping up stains and turn it frequently to avoid spreading the stain. Rinse with clean water and allow area to dry between steps.
- If stain removal causes a change in gloss level, apply polish to restore the shine.
 Do not use wax, do not buff. Allow polish to dry "tack-free" between coats.

If a substance is gummy, scrape off with dull knife. Clean using Heavy Duty Cleaner and Stripper and Food. a soft nylon pad or soft bristle brush. Saturate a **Beverages** clean, white cloth with bleach solution, cover stain and allow standing for no more than 1 hour. Tar, Oil, Asphalt, Scrape excess substance off with dull knife. Clean Grease, Wax, using Heavy Duty Cleaner and Stripper and a soft Paint (oil-based) nylon pad or soft bristle brush. Wipe with a clean, white cloth dampened with lighter fluid, painter's Scuffs, Marks, naphtha or isopropyl alcohol. Scratches Minor Cuts, Limit traffic over damaged area, cover with masking tape, contact your seller for advice. **Burns** Scrape excess off with a dull knife. Clean using Heavy Duty Cleaner and Stripper and a soft nylon pad or soft bristle brush. Wipe with a clean, Lipstick, white cloth dampened with lighter fluid, painter's **Antiseptics** naphtha or isopropyl alcohol. Saturate a clean, white cloth with bleach solution, cover stain and allow standing for no more than 1 hour. Clean using Heavy Duty Cleaner and Stripper and a soft nylon pad or soft bristle brush. Saturate a Rust clean, white cloth with bleach solution, cover stain and allow standing for no more than 1 hour.

Don't Use:

Crayon, Ink,

Hair Dye,

Permanent Marker

 Do not use detergents, abrasive cleaners or "mop and shine" products. They may leave a dull film on your floor.

Clean using Heavy Duty Cleaner and Stripper and

a soft nylon pad or soft bristle brush. Wipe with

a clean, white cloth dampened with lighter fluid,


painter's naphtha or isopropyl alcohol.

- Do not use paste wax or solvent based polishes.
- Do not use beater bar when vacuuming because it can visibly damage the floor surface.
- Do not use ammonia, acetone, lacquer thinner or highly abrasive scrubbing tools.



PLANK FLOORING ACCESSORIES

SPC T-MOULDING




SPC MULTI-PURPOSE REDUCER



Length 94.5"

SPC STAIR NOSE







FOREST COLLECTION

The SPC **PLUS** Forest Collection boasts a large 9"x 60" format with eight enticing colors to choose from. Coated with a 22 mil layer, a 1.5mm IXPE pad layer, and an overall 6.5mm thickness, this series is suitable for high traffic areas, whether commercial or residential, and is built to have long-lasting beauty with maximum sound absorption.

Excellent resistance to abrasion, chipping, cracking, and permanent indentations for heavy duty performance requirements.

5 - LAYER PLANK-6.5 M M • UV Layer • 22 mil Wear Layer • Decor Layer • Rigid Core - Limestone & PVC Polymer • 1.5mm IXPE

















FOREST TECHNICAL SPECIFICATIONS

Plank Size: 9"x 60"x 6.5mm

Edge Profile: 4-sided micro beveled

Carton SQFT: 18.70 square feet

Packaging: 5 pieces/carton



































RESISTANT TO WATER

EASY MAINTENANCE

RESISTANT

CHEMICALS

RETARDANCE

STATIC RESISTANT

RESISTANT

RESISTANT

HIGH ELASTICITY

ABSORPTION

QDIsurfaces




LAKEVIEW COLLECTION

The Lakeview Collection is a beautiful set of six different SPC Rigid Core color options, ranging from dark charcoal to sandy beige tones. The SPC (Stone Plastic Composite) Rigid Core is comprised of limestone, polyvinyl chloride and plasticizers, making the product very durable in commercial and residential spaces. The 1mm IXPE backing (bottom layer) serves as an insulator and maximum sound reducer. A fast and easy way to install flooring, the unilin locking system allows for no tools and is locked by a simple folding down motion.

Excellent resistance to abrasion, chipping, cracking, and permanent indentations for heavy duty performance 8 requirements.

4-LAYER PLANK-5MM • 12 mil Wear Layer -UV Coating & Super-Scratch resistant (Aluminum Oxide Overlay) Decor Layer • Rigid Core -Limestone & PVC Polymer • 1mm IXPE **QDI**surfaces



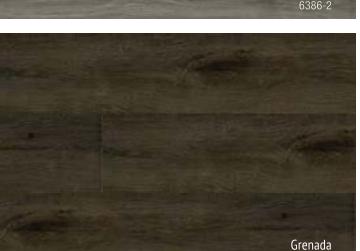









LAKEVIEW TECHNICAL SPECIFICATIONS

Plank Size: 7.17"x 48"x 5mm

Edge Profile: 4-sided micro beveled

Carton SQFT: 23.90 square feet

Packaging: 10 pieces/carton



6344-8



































RESISTANT TO WATER

EASY MAINTENANCE

RESISTANT

RESISTANT

CHEMICALS

RESISTANT

RESISTANT

HIGH ELASTICITY

ABSORPTION





RIVERSIDE COLLECTION

The Riverside Rigid Core SPC (Stone Plastic Composite) Collection is a rustic, natural wood-looking plank that is designed for use in commercial and residential applications. Coated with a rugged 20 mil wear layer, these planks are suitable for high volume traffic areas, providing a beauty that is long-lasting with no need for floor finishing. The 1mm IXPE backing layer serves as an insulator and maximum sound reducer. A fast and easy way to install flooring, the unilin locking system allows for no tools and is locked by a simple folding down motion.

Excellent resistance to abrasion, chipping, cracking, and permanent indentations for heavy duty performance 10 requirements.



















RIVERSIDE TECHNICAL SPECIFICATIONS

Plank Size: 7.17"x 48"x 5.5mm

4-sided micro beveled Edge Profile:

Carton SQFT: 21.51 square feet

Packaging: 9 pieces/carton







































MAINTENANCE

RESISTANT

RESISTANT

CHEMICALS

RETARDANCE

RESISTANT

SCRATCH RESISTANT

RESISTANT

HIGH ELASTICITY

ABSORPTION



MERCHANDISING AID



LOW PROFILE STEEL PAVER RACK

16"WIDE x 27"LENGTH

2CM PORCELAIN PAVER RACK HOLDS UP TO 10 PAVER SAMPLES SKU#: MKT-2CM/PAVER DISPLAY

3CM NATURAL STONE PAVER RACK HOLDS UP TO 7 PAVER SAMPLES SKU#: MKT-3CM/PAVER DISPLAY

5CM NATURAL STONE PAVER RACK HOLDS UP TO 5 PAVER SAMPLES SKU#: MKT-5CM/PAVER DISPLAY



3-TIER WATERFALL RACKS

34"WIDE x 27.75"LENGTH HOLDS UP TO 39 TILE SAMPLES SKU#: MKT-WAFA-39CT/TRIPLEWIDE TILE



SKU#: MKT-WOODEN/WATERFALL RACK



SHEET METAL TILE RACK

10"WIDE x 26"LENGTH HOLDS UP TO 10 TILES AT 24"x 24", 24"x 36" & 24"x 48" SKU#: MKT-DISPLAY/LARGE FORMAT TILE



WATERFALL SPC RACK

21.75"WIDE x 31.25"LENGTH HOLDS UP TO 10 BOARDS AT 20"x 28" SKU#: MKT/SPC DISPLAY



MULTI-TIERED WALL TILE RACK **SET OF 3 TOWERS**

26"WIDE x 32"LENGTH HOLDS UP TO 12 BOARDS AT 26"x 19" SKU#: MKT-TOWER/WALL TOWER DISPLAY



MULTI-TIERED QUARTZ RACK 201/2"WIDE x 16"LENGTH HOLDS UP TO

32 QUARTZ SAMPLES AT 6"x 8" SKU#: MKT-DISPLAY/QUARTZ SLAB DISPLAY



SPC SAMPLE CHAIN SETS SKU#: MKT/FOREST CHAINSET SKU#: MKT/LAKEVIEW CHAINSET

SKU#: MKT/RIVERSIDE CHAINSET

MULTI-TIERED TURF RACK

39"WIDE x 16"LENGTH HOLDS UP TO 12 SAMPLES AT 11.5"x 12"



SPLIT-FACE RACK 16"WIDE x 23"LENGTH

HOLDS UP TO 11 BOARDS AT 6"x 16" SKU#: MKT-DISPLAY/LEDGERSTONE

MARKETING AIDS















- 1 PORCELAIN TILE CATALOG
- 2 PORCELAIN PAVER CATALOG
- 3 WALL TILE CATALOG
- 4 GLASS MOSAICS & POOL TILE CATALOG
- 5 PORCELAIN & QUARTZ SLAB CATALOG
- 6 NATURAL STONE & GLASS MOSAICS CATALOG
- 7 SPC RIGID CORE LUXURY VINYL PLANKS CATALOG

- 8 WATERLINE POOL TILES BROCHURE
- 9 PORCELAIN PAVER BROCHURE
- 10 GLASS MOSAIC TILE BROCHURE
- 11 PORCELAIN PAVER QUADFOLD
- 12 SPLIT-FACE MOSAICS
 & LEDGERSTONE QUADFOLD
- 13 WATERLINE POOL TILE QUADFOLD
- 14 NATURAL STONE PAVER QUADFOLD

























PRODUCT CLASSIFICATION

ASTM F 1700 Solid Vinyl Tile Class III, Type B

FIRE TESTING

ASTM E 648 Critical Radiant Flux Meets or exceeds Class 1

GENERAL PERFORMANCE

ASTM C1028-96 Static Coefficient of Friction .060 slip resistance Passes ADA/OSHA standard

ASTM F970 Static Load .004 inch Passes 250

ASTM F925 Resistance to Chemicals No Change

ASTM F1514 Heat Stability of Color $\Delta E < 8 \text{ Avg}$ **ASTM F1515** Light Stability of Color $\Delta E < 8 \text{ Avg}$

ASTM F1914 Residual Indentation 3.4%

ASTM F2199 Dimensional Stability .20"/in ft
ASTM E648 Critical Radiant Flux Class 1

ASTM E492-09 Impact Sound Conduction IIC 64db

ASTM E90-09 Airborne Sound Conduction *STC 64db* **ASTM F2753** Rolling Load Over Resilient .024 inch

ASTM C518 Thermal Resistance R Value .057

WARRANTY

25-Year Limited Residential (Lakeview)

Limited Residential Lifetime (Forest & Riverside)

7-Year Limited Light Commercial (Lakeview)

12-Year Limited Light Commercial (Forest & Riverside)

PHOENIX

2633 NORTH 24TH DRIVE PHOENIX, AZ 85009 O. 602-269-7900 F. 602-233-1100 PHOENIX®ODISURFACES.COM

ANAHEIM

4616 EAST LA PALMA AVE
ANAHEIM, CA 92807
O. 714-695-0084
F. 714-695-6650
ORDERS ANAHEIM@ODISURFACES COM

HOUSTON

5800 CENTRALCREST STREET HOUSTON, TX 77092 O. 713-957-2600 F. 713-957-2601

TUCSON

3359 N FWY DR, BLDG #1 TUCSON, AZ 85705 O. 520-416-8100 F. 520-416-8102

THE WOODLANDS

312 SPRING HILL DRIVE SPRING, TX 77386 O. 281-651-4285 F. 713-957-2601

DALLAS

2605 FREEWOOD DRIVE
DALLAS, TX 75220
O. 214-741-2200
F. 214-741-2201
DALLAS OPERATIONS ODISIJERACES COM

SPRINGDALE

3046 N THOMPSON ST SPRINGDALE, AR 72764 O. 479-365-6555 F. 479-365-6999 SPRINGDALE OPERATIONS@ODISURFACES.COM

HOUSTON DC

12955 EMMETT ROAD HOUSTON, TX 77041 O. 832-986-6515 F. 713-957-2601

FORT WORTH

6318 AIRPORT FWY, STE A
HALTOM CITY, TX 76117
O. 817-834-8491
F. 817-834-3178

FTWORDFES®ODISIRFACES COM

WWW.QDISURFACES.COM

INFO@QDISURFACES.COM

